

Model:GT-49-4

Size

Diameter: 49mm

Height: 23.5mm



Edge thickness: 3.6mm

Angle: 70°


Material: Borosilicate glass

Brief Introduction:

This product is used for the high-bay lighting and other purpose with the 30W~100W integrated chip

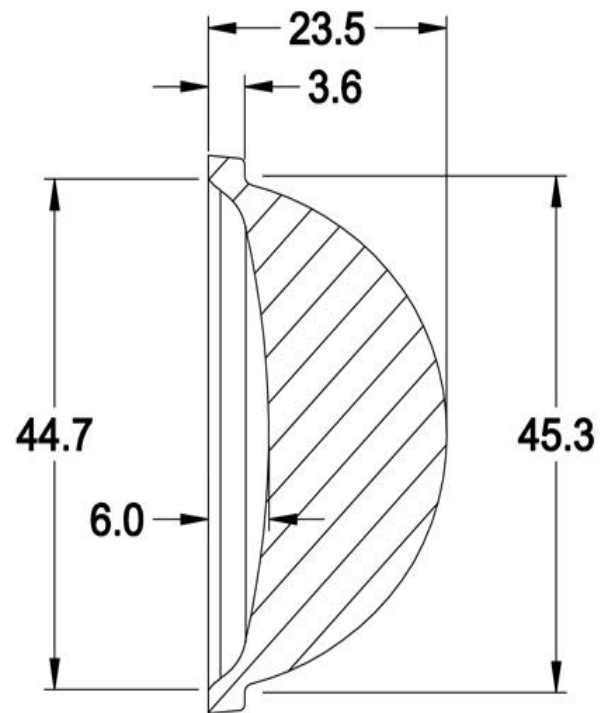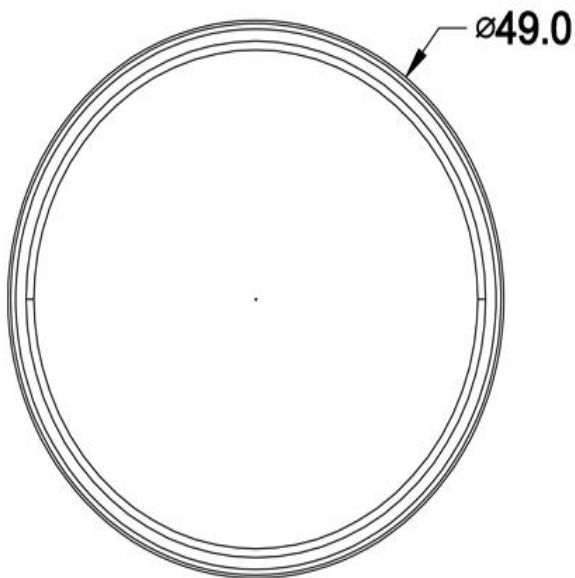

>Product Detail

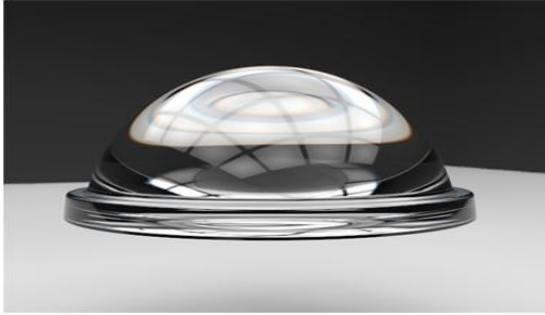


>More Features

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.0595A P:8.915W PF:0.6794 Lamp Flux:1000x1 lm					
NAME: 49-4 2014.5.23			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.:		PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 54.42 lm/W
MODEL		Imax(cd/klm)	438.4	S/MH(C0/180)	1.07	
NOMINAL POWER(W)		LOR(%)	48.5	S/MH(C90/270)	1.08	
RATED VOLTAGE(V)	220.0	TOTAL FLUX(lm/klm)	485.13	η UP,DN(C0-180)	0.1,23.7	
NOMINAL FLUX(lm)	1000	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,24.7	
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.00	
TEST VOLTAGE(V)	220.0	η down(%)	48.4	CIBSE SHR MAX	1.05	

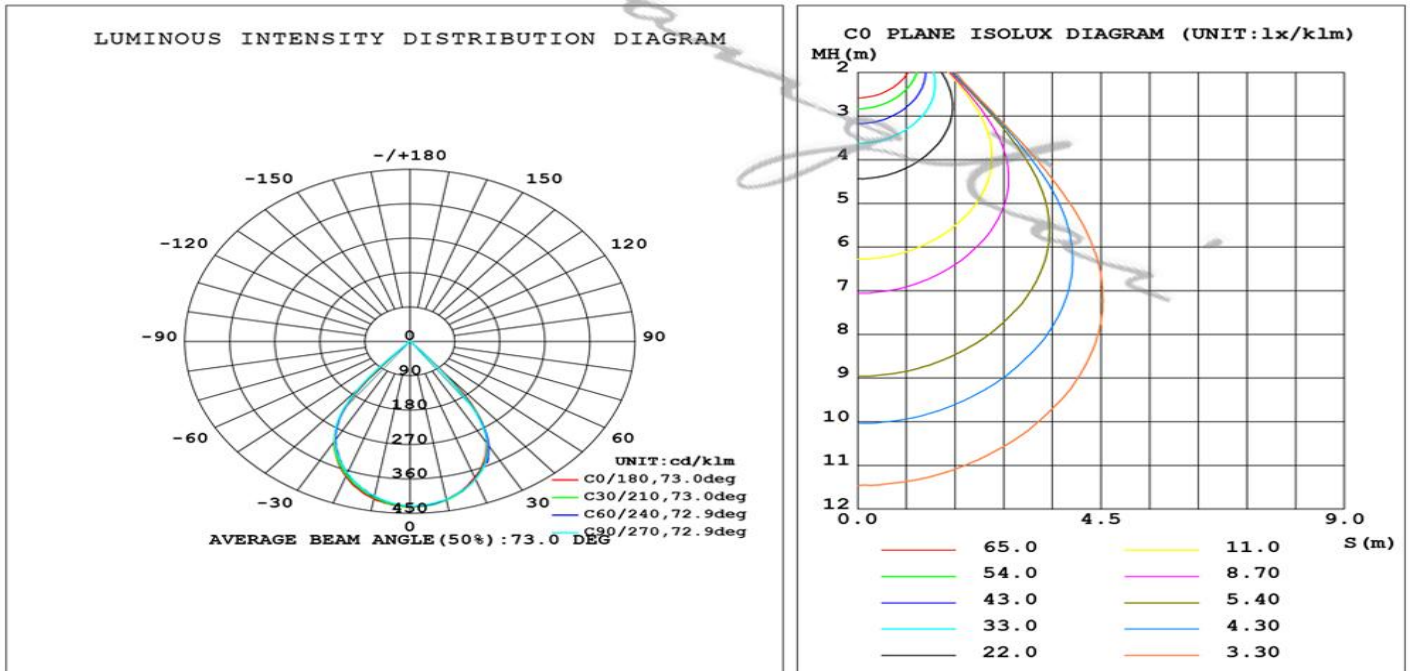

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2014-05-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.0.284
Humidity:65.0%
Test Distance:2.968m [K=1.0000]
Remarks: