

Model:GT-78-17

Size

Diameter: 78mm

Height: 29.8mm


Edge thickness: 4mm

Angle: $125^{\circ}80^{\circ}$


Material: Borosilicate glass

Brief Introduction:

This product is used for the street lighting and other purpose with the 10W~50W integrated chip

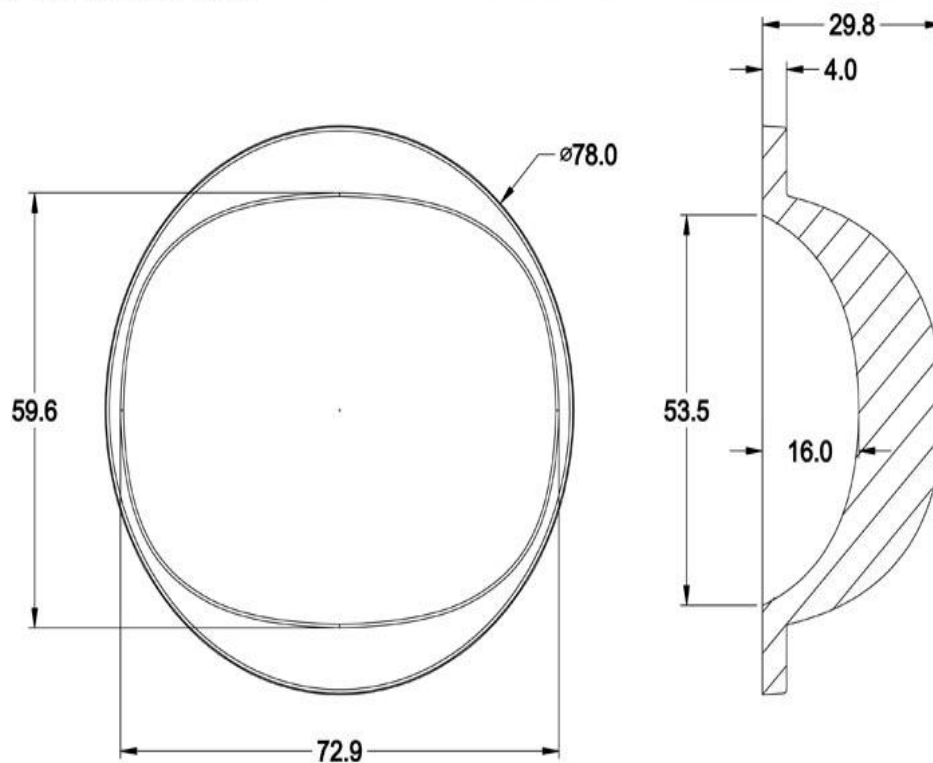

Product Detail


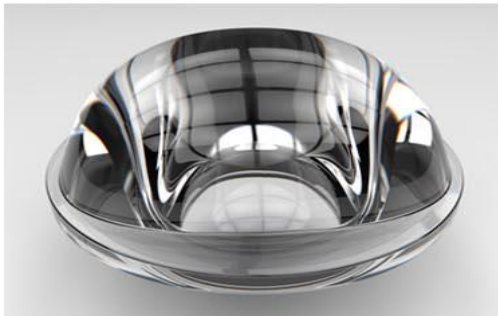


More Features

STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:29.10V I:0.6100A P:17.75W PF:1.000 Lamp Flux:2592.54x1 lm		
NAME: 78-17 2015.11.24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 147.90 lm/W
MODEL	V18	Imax (cd)	925.2	η street_up (%)	0.1	
NOMINAL POWER (W)	17	LOR (%)	101.3	η street_down (%)	56.0	
RATED VOLTAGE (V)	28.5	TOTAL FLUX (lm)	2625	η house_up (%)	0.1	
NOMINAL FLUX (lm)	2592.54	MAXIMUM @ (C, γ)	90, 19.0	η house_down (%)	45.0	
LAMPS INSIDE	1	η up (%)	0.2	76 FLASHAREA (m2)		
TEST VOLTAGE (V)	29	η down (%)	101.0	SLI		

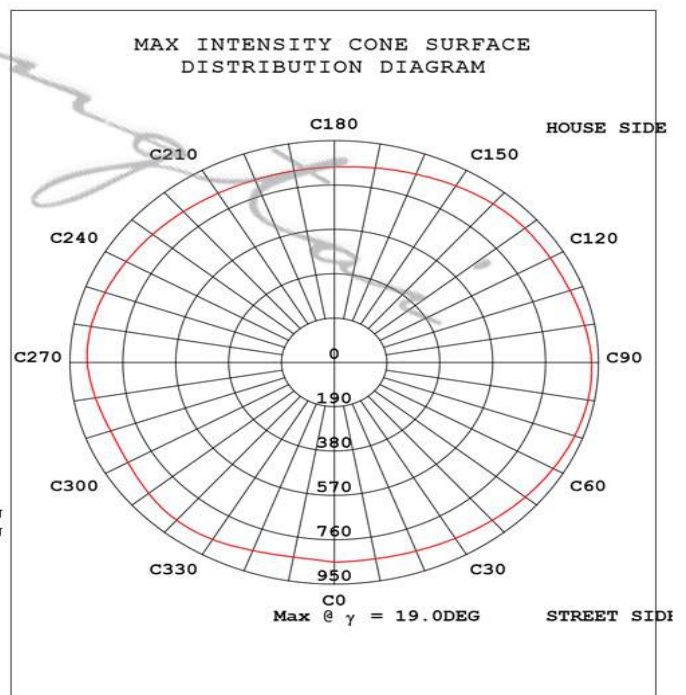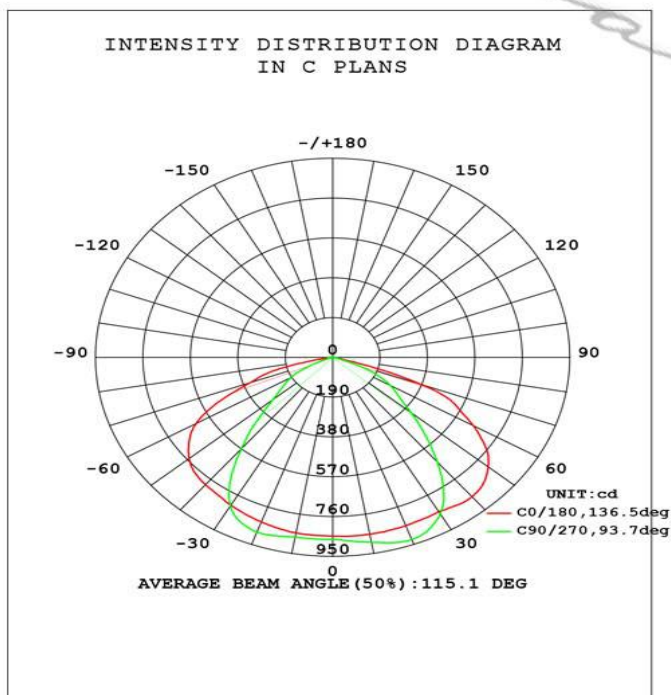

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2015-11-24

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.0.284
Humidity: 65.0%
Test Distance: 2.968m [K=1.0000]
Remarks: