

Model:GT-78-31

Size

Diameter: 78mm

Height: 44mm



Edge thickness: 4mm

Angle: 45°



Material: Borosilicate glass

Brief Introduction:

This product is used for the high-bay lighting and other purpose with the 30W~100W integrated chip

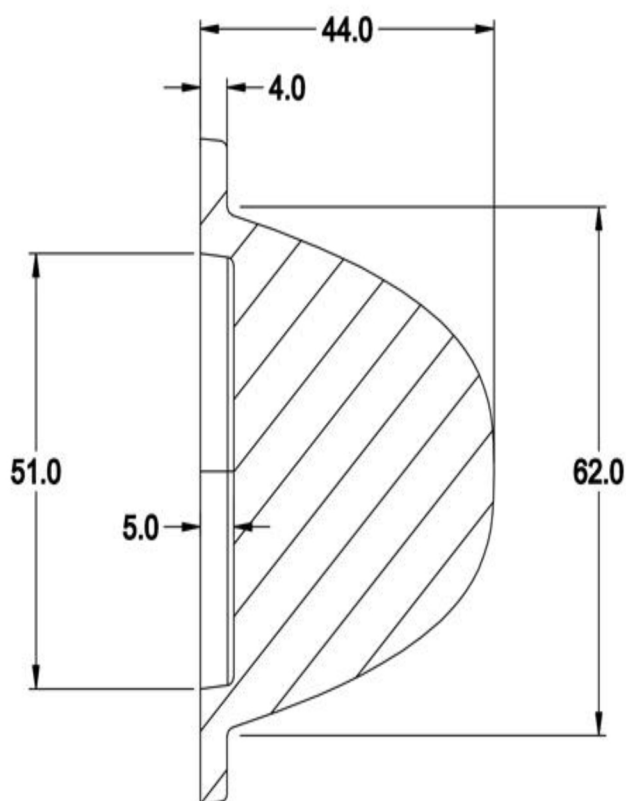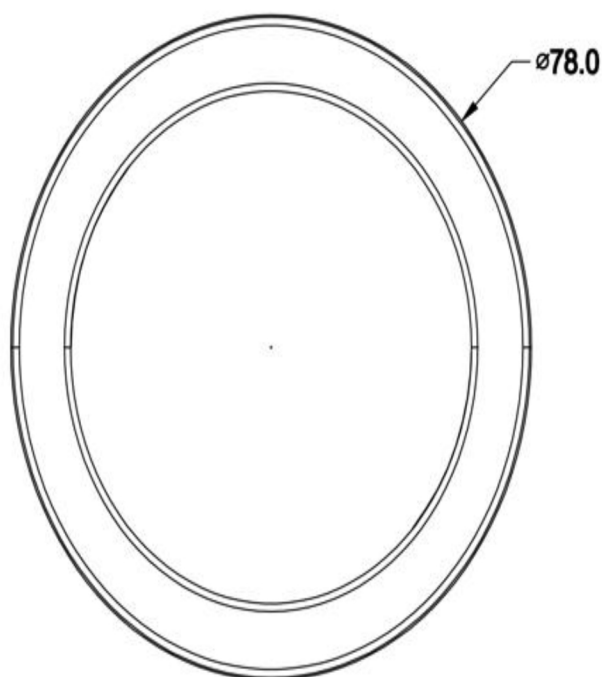

>Product Detail

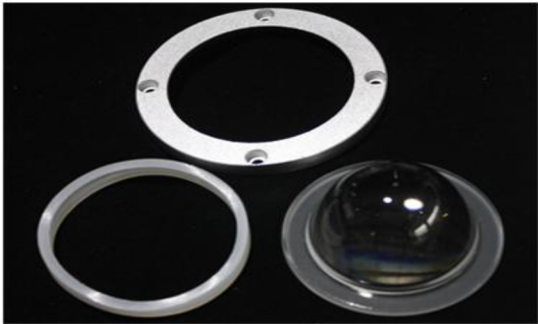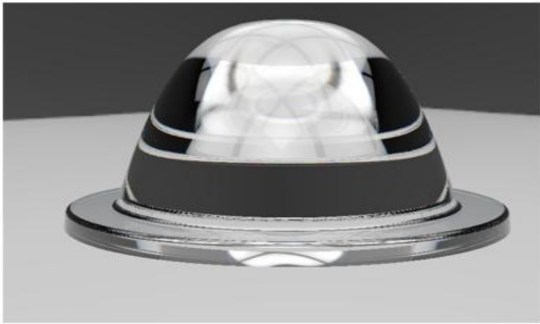

>More Features

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:35.18V I:1.042A P:36.65W PF:1.000 Freq:0Hz Lamp Flux:5383.37x1 lm		
NAME: 78-31--046(2018.8.18)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 147.98 lm/W
MODEL	046	Imax(cd)	10538	S/MH(C0/180)	0.74	
NOMINAL POWER(W)	35	LOR(%)	100.7	S/MH(C90/270)	0.79	
RATED VOLTAGE(V)	35	TOTAL FLUX(lm)	5423.7	η UP,DN(C0-180)	0.0,40.4	
NOMINAL FLUX(lm)	5383.37	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,60.4	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	50	η down(%)	100.7	CIBSE SHR MAX	1.00	

