

Model:GT-78-60

Size

Diameter: 78mm

Height: 25.5mm


Edge thickness: 4.2mm

Angle: $100^{\circ} \times 57^{\circ}$

Material: Borosilicate glass

Brief Introduction:

This product is used for the street lighting and other purpose with the 10W~50W integrated chip

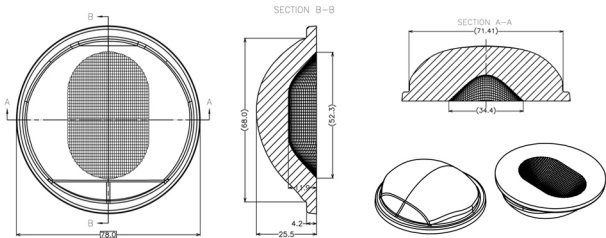

>Product Detail





>More Features

STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:37.04V I:0.9003A P:33.35W PF:1.000 Freq:0Hz Lamp Flux:3622.61x1 lm		
NAME: 78-60 (036) 2017.3.15	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 119.01 lm/W			
MODEL	036	Imax(cd)	2361	η street_up(%)	0.1
NOMINAL POWER(W)	30	LOR(%)	109.6	η street_down(%)	56.3
RATED VOLTAGE(V)	37	TOTAL FLUX(lm)	3969	η house_up(%)	0.1
NOMINAL FLUX(lm)	3622.61	MAXIMUM @ (C, γ)	0,57.0	η house_down(%)	53.0
LAMPS INSIDE	1	η up(%)	0.3	76 FLASHAREA(m2)	0.05000
TEST VOLTAGE(V)	37	η down(%)	109.3	SLI	17.010

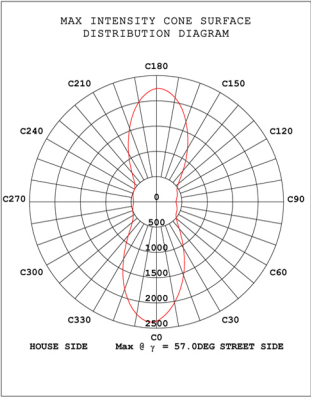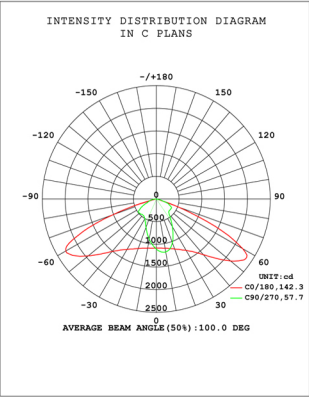

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 0.5DEG
Test Speed: MEDIUM	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.0.284
Temperature:25.3DEG	Humidity:65.0%
Operators:DAMIN	Test Distance:2.968m [K=1.0000]
Test Date:2015-11-24	Remarks: