

Model:GT-85-13

Size

Length: 84.9mm

Width: 69.3mm

Height: 26.7mm



Angle: 75°135°

Edge thickness:4mm


Material:Borosilicate glass

Brief Introduction:

This product is used for the street lighting and other purpose with the 50W~150W integrated chip

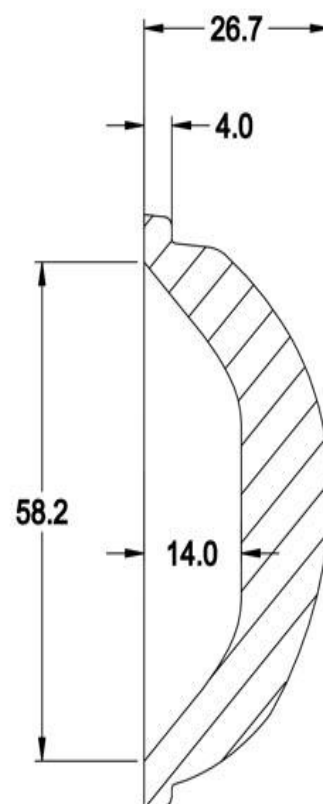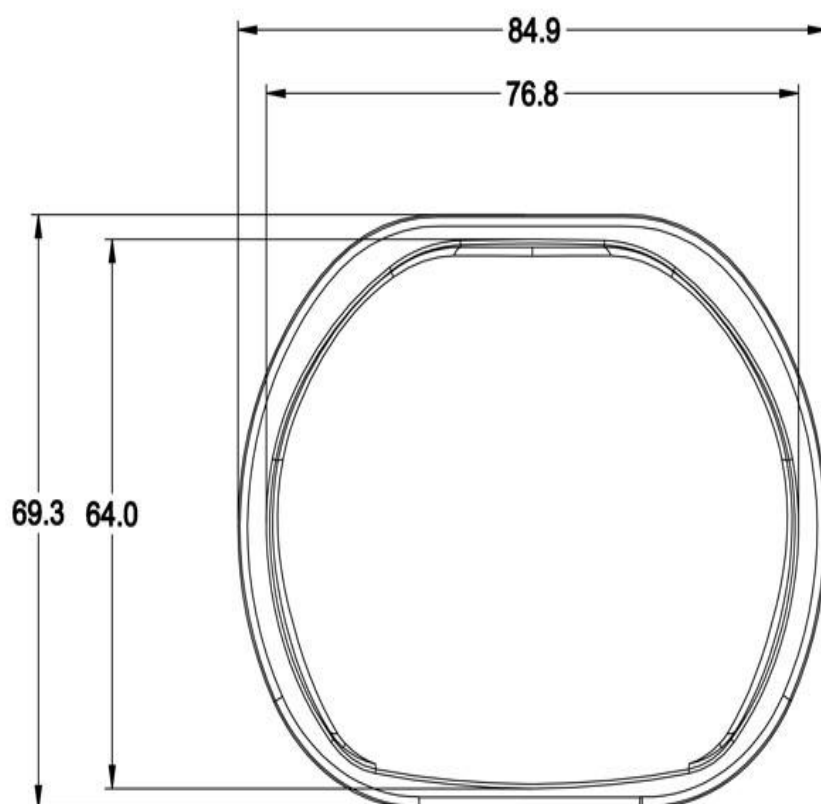

>Product Detail


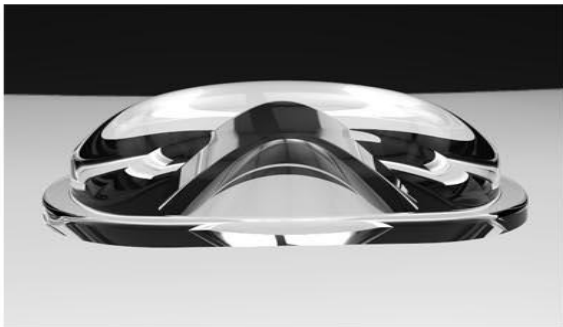


>More Features

STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:36.29V I:1.022A P:37.10W PF:1.000 Lamp Flux:3572.81x1 lm		
NAME: 85-13 2015.12.5	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 94.83 lm/W
MODEL	CXM-18	Imax (cd)	1922	η street_up (%)	0.2	
NOMINAL POWER (W)	36	LOR (%)	98.5	η street_down (%)	52.7	
RATED VOLTAGE (V)	36	TOTAL FLUX (lm)	3518	η house_up (%)	0.2	
NOMINAL FLUX (lm)	3572.81	MAXIMUM @ (C, γ)	180,62.0	η house_down (%)	45.5	
LAMPS INSIDE	1	η up (%)	0.3	76 FLASHAREA (m2)		
TEST VOLTAGE (V)	36.3	η down (%)	98.1	SLI		

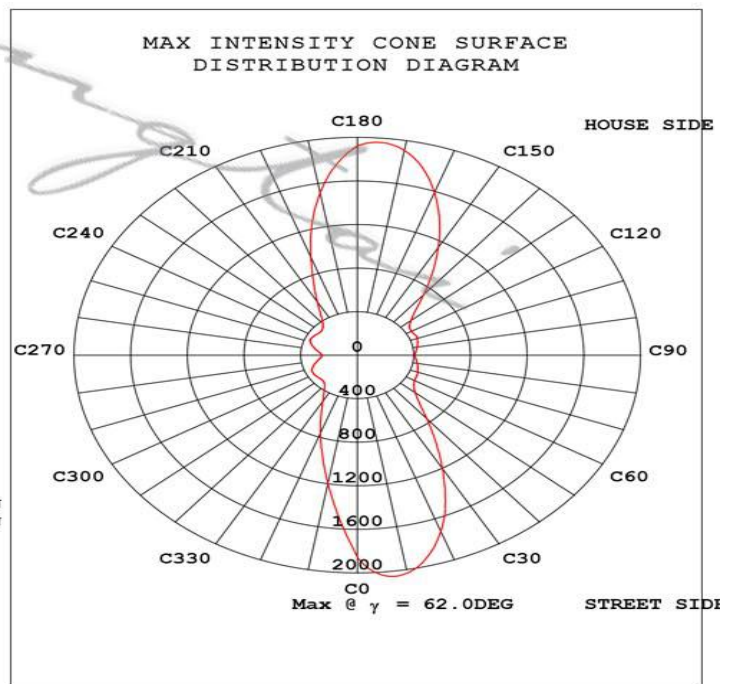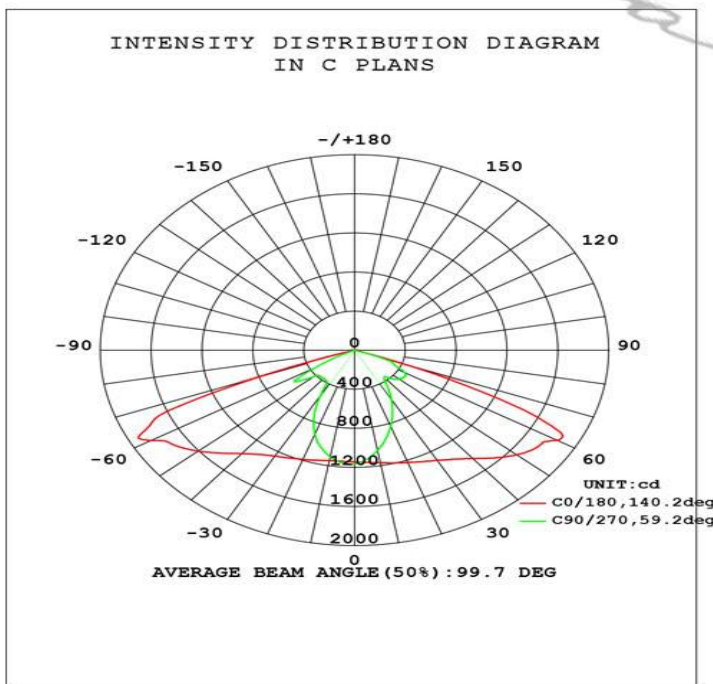

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2015-12-05

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.0.284
Humidity: 65.0%
Test Distance: 2.968m [K=1.0000]
Remarks: