

Model:GT-82-12

Size

Dimension : 81.3*53.6mm

Height: 24.4mm



Edge thickness:3.1mm

Angle: 104°61'

Material:Borosilicate glass

Brief Introduction:

This product is used for the street lighting and other purpose with the 10W~50W integrated chip



>Product Detail





>More Features

STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:36.97V I:1.070A P:39.57W PF:1.000 Freq:0Hz Lamp Flux:4668.24x1 lm		
NAME: 82-12 2016.2.25	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 118.05 lm/W
MODEL		Imax(cd)	2625	η street_up(%)	0.4	
NOMINAL POWER(W)	40	LOR(%)	100.1	η street_down(%)	67.8	
RATED VOLTAGE(V)	37	TOTAL FLUX(lm)	4671	η house_up(%)	0.3	
NOMINAL FLUX(lm)	4668.24	MAXIMUM @ (C, γ)	23,61.0	η house_down(%)	31.6	
LAMPS INSIDE	1	η up(%)	0.6	76 FLASHAREA(m2)	0.05000	
TEST VOLTAGE(V)	36.9	η down(%)	99.4	SLI	21.373	

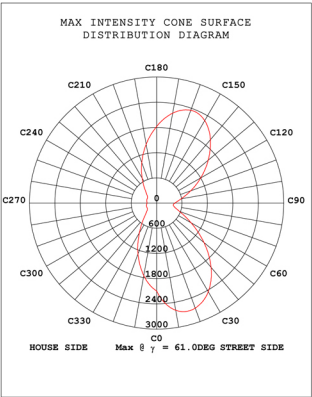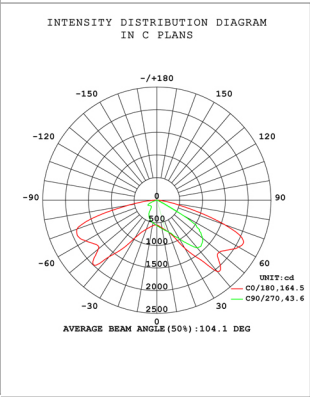

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 0.5DEG
Test Speed: MEDIUM	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.0.284
Temperature:25.3DEG	Humidity:65.0%
Operators:DAMIN	Test Distance:2.968m [K=1.0000]
Test Date:2015-11-24	Remarks: